


# TANGO™ EXPRESS

COMBO FIREWIRE® 400/USB 2.0 ADAPTER FOR PCI EXPRESS®

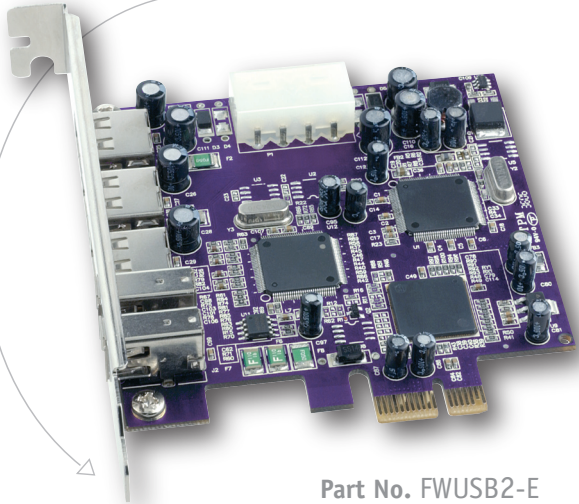

Part No. FWUSB2-E

## Add Plenty of Ports for Peripherals

Everybody's got USB peripherals—keyboards, mice, printers, scanners, joysticks, digital cameras, iPod® mobile digital devices, external drives—and there never seems to be enough ports on a computer to plug all of them in at the same time. Problem solved—install a Sonnet Allegro Express USB in your computer to add five more USB 2.0 ports! Considering a hub? Consider the tradeoffs—every peripheral you plug in has to share a single port's bandwidth (potentially affecting the devices' performance), and you may have to plug it into a power outlet as well as your computer in order to operate some devices.

Sonnet's Allegro Express USB adds five full-bandwidth, high-speed USB connections to your computer without the need for an external box or AC power adapter—no trade-offs necessary. Each of this card's five powered ports supports bus-powered peripherals (devices that work without a separate power supply, including some external drives and scanners) and high-speed data transmission. With no drivers to install, this card offers simple plug and play installation in Mac and Windows computers—Allegro Express USB adds USB connectivity, outside and in, without compromise.

## Compatibility

- ▶ Mac® Pro
- ▶ Power Mac G5 with PCI Express slots
- ▶ Mac OS® X Version 10.3 or later
- ▶ PC with PCI Express slot
- ▶ Windows XP with SP2
- ▶ Windows Vista

## Key Features

- ▶ Simple way to add more USB 2.0 and FireWire 400 ports to any compatible computer
- ▶ Easy installation—plug and play—no drivers to install
- ▶ Supports simultaneous low-, full-, and hi-speed device connections—maximizes performance for each port
- ▶ Provides fast interface to download videos from your digital camcorder, transfer files to external drives, and more
- ▶ Supports hot-swappable device connection—plug in and disconnect peripherals without shutting off your computer

## TECHNICAL SPECIFICATIONS

### Hardware

Bus Interface	PCI Express x1
Peripherals Supported	Supports all industry standard USB 1.1 and USB 2.0 peripheral
Cables Supported	USB cables with "A"-type connector

### FireWire Support

Number of Ports	2 external
Standard	IEEE 1394A compliant
Data Transfer Rate	100/200/400 Mbits/s
Number of Devices Supported	Up to 63 (data only)
Hot Plug	Supports hot-pluggable and hot-swappable device connection

### USB Support

Number of Ports	3 external
Standard	USB Specification v. 1.0/1.1/2.0 compatible Complies with OHCI (Open Host Controller Interface) and EHCI (Enhanced Host Controller Interface)
Data Transfer Rate	USB 2.0 - 480 Mbits/s USB 1.1 - 12 Mbits/s
Number of Devices Supported	Up to 127
Hot Plug	Supports hot-pluggable and hot-swappable device connection



Sonnet Technologies, Inc.  
8 Autry, Irvine, CA 92618-2708 USA  
Tel: 1-949-587-3500 Fax: 1-949-457-6350  
www.sonnettech.com



For Windows

RoHS COMPLIANT

